



ARMASIGHT by FLIR **COMMAND® 336**

Thermal Imaging Bi-Ocular

Command 336 is a family of Thermal Imaging bi-oculars with professional Germanium (Ge) objective lenses. The bi-ocular design is better for sustained viewing periods and improved depth perception. The Command 336 product line is based on the advanced FLIR VOx microbolometer core technology, and includes a variety of different models, each optimizing performance, price, and state-of-the-art capabilities for a variety of uses and missions. The Command 336 is a solid-state, uncooled, long-wave infrared, magnified, dedicated handheld thermal imager intended for day and nighttime missions.

Command 336 Thermal Imaging bi-oculars are characterized by their simple but intuitive controls, functions, and features that are layered among direct button adjustments, direct combination button functions, and electronic menu selections. The Command 336 has the ability to record imagery and is equipped with video-out capabilities.

The Command 336 Thermal Imaging bi-ocular represents one of the most sophisticated devices for long-range observation on the market today, due to its superior price-to-performance value.



THERMAL NIGHT VISION

- Detects small variations in temperature, so you can see heat signatures day and night without additional illumination that can give your position away

RUGGED CONSTRUCTION

- With a rugged, fiberglass-reinforced construction, Command 336 can stand up to the daily abuse of tough missions

LENS OPTIONS

- Command 336 gives users a choice between multiple lens options

IMAGING THAT EXCELS

- In addition to the SVGA OLED display, the scope also features multiple color palettes and digital zoom for extra reach

EASY TO USE

- Its simple, intuitive 3-button controls give you rapid access to digital zoom and easy to navigate drop-down menus


OUTSTANDING WARRANTY

- The limited warranty covers the system for 3 years, while the infrared detector is covered for a full 10 years



Specifications

	COMMAND 336 3-12X50	COMMAND 336 5-20X75	COMMAND 336 8-32X100
Sensor Specifications			
Detector Type	336 x 256 VOx Microbolometer		
Video Refresh Rate	9 Hz, or 30 Hz, or 60 Hz		
Start Up	3 seconds		
Objective Lens Type	Germanium		
Type of Focal Plane Array	FLIR Tau 2		
System Specifications			
Lens System	50 mm; F/1.0	75 mm; F/1.1	100 mm; F/1.3
Optical Magnification	2.8x	5x	8x
Field of View (H x V)	7.8° x 5.9°	4.3° x 3.2°	3.3° x 2.5°
Digital Zoom	1x, 2x, 4x		
Diopter Adjustment Range	-5 to +5 dpt		
Focusing Range	5m to infinity		
Display	800x600 OLED SVGA 060		
Video Output	PAL (768x574 pixels)*/ NTSC (640x480 pixels)		
Temperature Imaging Modes (Image Palettes)	White Hot, Black Hot, Fusion, Rainbow, Globow, Ironbow1, Ironbow2, Sepia, Color1, Color2, Ice-Fire, Rain, and OEM		
User Interface			
Operation Switch	On/ Off/ Standby Mode		
Control Panel Buttons	Configures Operational Settings: <ul style="list-style-type: none"> • Display Brightness Control • Image Palette Control • Digital Zoom Control • On-Screen Menu Navigation 		
Focus Ring	Adjusts the Objective Lens Focus		
Diopter Adjustment Rings	Adjusts the Eyepiece Diopter		
Special user-adjustable imaging tools			
	<ul style="list-style-type: none"> • Active Contrast Enhancement (ACE) - "CONTRAST" • Second Generation Digital Detail Enhancement (DDE) - "SHARPNESS" • Smart Scene Optimization (SSO) - "SMART SCENE" <ul style="list-style-type: none"> • Automatic Gain Control - "GAIN" • Information-Based Histogram Equalization (IBHEQ) - "SKY/SEA" <ul style="list-style-type: none"> • User-Controlled Manual Non-Uniformity Correction/ Flat-Field Correction (UCMNUC/ FFC) • Silent Shutterless NUC™ (SSN) 		
Interfacing			
Connector	Power In, Analog Video In/Out, Digital Video Recorder, Laser Range Finder Connections		
Power			
Battery Type	Two CR123A 3V Lithium batteries or CR123 type rechargeable batteries with voltage from 3.0V to 3.7V (2)		
Battery Life (Operating)	Up to 4 hr		
Environmental			
Operating Temperature Range	-40°C to +50°C (-40°F to +122°F)		
Storage Temperature Range	-50°C to +70°C (-58°F to +158°F)		
Physical			
Weight	0.8 kg (1.8 lbs)	1.08 kg (2.4 lbs)	1.3 kg (2.9 lbs)
Size	238x100x62 mm (9.4x3.9x2.2 in)	272x102x89 mm (10.7x4.0x3.5 in)	290x116x116 mm (11.4x4.5x4.5 in)
Color (housing)	Black		
Country of Origin	USA		
Package Includes			
Thermal Bi-Ocular, CR123A Battery (2), Battery Cassette, Quick Start Guide, Soft Carrying Case			

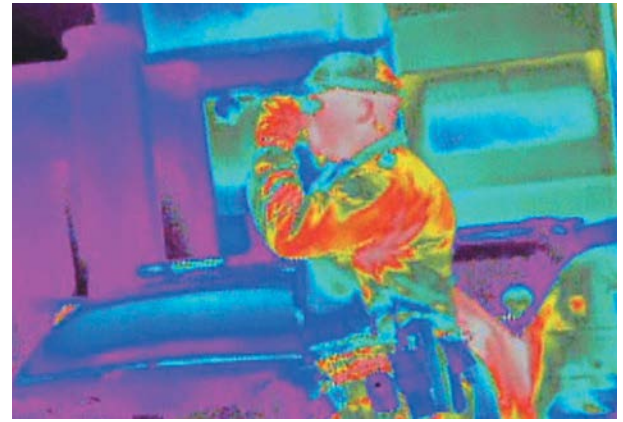

OUTDOOR & TACTICAL SYSTEMS

FLIR Systems, Inc.
815 Dubuque Ave,
San Francisco, CA 94080
USA
PH: +1 888.959.2259
F: +1 888.959.2260
Intl Phone/Fax: (650) 492-7755
OTS-Support@flir.com

www.flir.com
www.armsight.com

Equipment described herein may require US Government authorization for export purposes. Diversion contrary to US law is prohibited.

©2013 FLIR Systems, Inc. Specifications are subject to change without notice, check our website: www.flir.com