

Thermal Imaging Monocular Cyclops 670D Technical Specifications

ThermTec Technology Co., Ltd. Email: info@thermeyetec.com Website: https://www.thermeyetec.com









Cyclops 670D

Key Features

- 640*512 thermal resolution, NETD≤25mk;
- Automatic object detection and distance measurement;
- Picture in picture function;
- 1x--6x continuous digital zoom;
- Various pseudo colors;
- Joystick control design;
- 1024*768 resolution with 0.39 inch OLED display;
- Up to 12h continuous working for lithium battery;
- WDR/Object/Target outline mode

Applications


- Night hunting
- Observation
- Rescue operations
- Hiking and traveling

Specifications

Model	CP670D
Туре	Uncooled
Resolution	640x512
Pixel pitch	12µm
NETD	25mk@300k
Spectral range	8-14µm
Frame rate	50HZ
	Optics
Objective lens	35mm/F0.9 70mm/F1.0 Dual FOV
Field of view	12.5°x10.0° 6.3°x5.0°
Magnification	2.0X-4.0X
Digital zoom	1 - 6X continuous zoom
Eye relief	40mm
Exit pupil	6mm
Diopter	±5D
	Display
Туре	AMOLED
Resolution	1024x768
Display size	0.39 inch
Color palette	6
Image mode	WDR/Object/Target outline mode

	Function
Photo/video playback	Yes
Language	Multiple languages
Built-in memory	32GB
PIP	Yes
AI/MIL distance measurement	Yes
Heat track	Yes
GPS	Yes
Real-time notification	Yes
OSD recording	Yes
	Interface
Type-C	Supports battery charging, data transfer and analog video output
Wi-Fi	Two-way Wi-Fi connection; App remote control
	Battery
Battery type	Internal high capacity lithium ion (18650 x 2)
Battery life	Continuous working time ≥12h
	Environment
Operating temperature	-20°C—+50°C
IP rating	IP67
Weight, g	780±10
Dimension, mm	228(L) x 83(W) x 83(H)
	Accessories
External cable	Analog video cable; USB data cable
Other Accessories	Wrist strap; plush bag; user manual



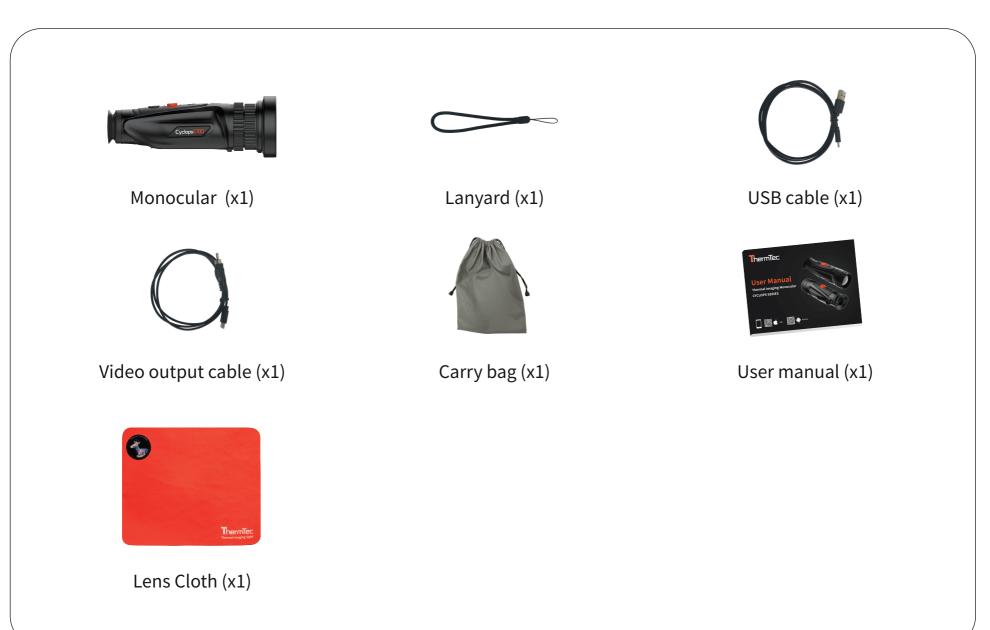

Dimension

Unit: mm

